

# DC15

## Rugged 10.4" Panel PC with Front Keys or Touch Screen UIC 612 Railway Display Computer

- » 10.4" display with LED backlight
- » 1024 x 768 pixels resolution
- » AMD Embedded G-Series
- » Wireless communication 2G, 3G, 4G, WLAN, GNSS
- » MVB interface (optional)
- » All external interfaces on M12 connectors
- » -40 to +70°C operating temperature
- » Fanless and maintenance-free design
- » Compliant to IP65 (front) and EN 50155 (railway)
- » Windows and Linux support



### Robust Panel PC for Interactive Rail Applications

The DC15 panel PC is a rugged, fanless and maintenance-free human-machine interface (HMI) for railway applications. It features a 10.4" display and a projected capacitive touch screen or 32 illuminated front keys. Its small, ultra-flat mechanical design and configuration options save space in the driver cabin and allow the panel to be tailored for all types of applications in different train models. In addition, its full software compatibility with the [12.1" DC17 panel PC](#) both increases flexibility and lowers costs, e.g., if an upgrade to a larger panel is necessary.

### High-Quality, High-Resolution Display

The DC15 houses a robust impact-resistant XGA TFT LCD display with LED backlight, and features high illumination intensity. This ensures good readability, even when exposed to sunlight. It also features a buzzer for alarm purposes, as well as LEDs and a light sensor at the front. Due to its high resolution and optimized usability, it is a perfect choice for applications like CCTV.

### Powerful & Energy-Efficient Computing

Built around a T40E AMD Dual Core processor with 1.0 GHz, the DC15 is equipped with 2 GB RAM and a 16 GB mSATA disk. Standard interfaces include two Fast Ethernet, one USB, one CAN, one audio, one GPIO, and one serial - all available on M12 connectors at the back of the panel PC.


An M.2 slot and PCI Express Mini Card interface can control wireless communication functions like 2G, 3G, 4G and GPS. Two micro-SIM card slots with dual-SIM functionality are accessible at the back of the panel.

### Flexible Rail Network Connection Options

The DC15 can provide Multifunction Vehicle Bus (MVB) master or slave support where necessary, by adding an MVB PCI Express Mini Card from Duagon. This makes the display scalable for different applications.

### Extremely Rugged, Perfectly Rail-Ready

The DC15 comes with an extremely rugged housing with an IP65 compliant front. It supports a railway-compliant power supply of 24 or 110 VDC, its internal PSU complying with EN 50155 class S2. Also in compliance with the standard, the DC17 operates in a class TX -40°C to +70°C environment (+85°C for 10 minutes), achieved through fanless conduction-cooling technology. All electronic components are soldered to withstand shock and vibration, backed up by its solid M12 connectors, and are protected by conformal coating. The panel PC meets all important requirements for railway equipment for fast, competitive time-to-market even in mission-critical environments. At the same time its long availability and life-time of seven years reduces overall system costs.

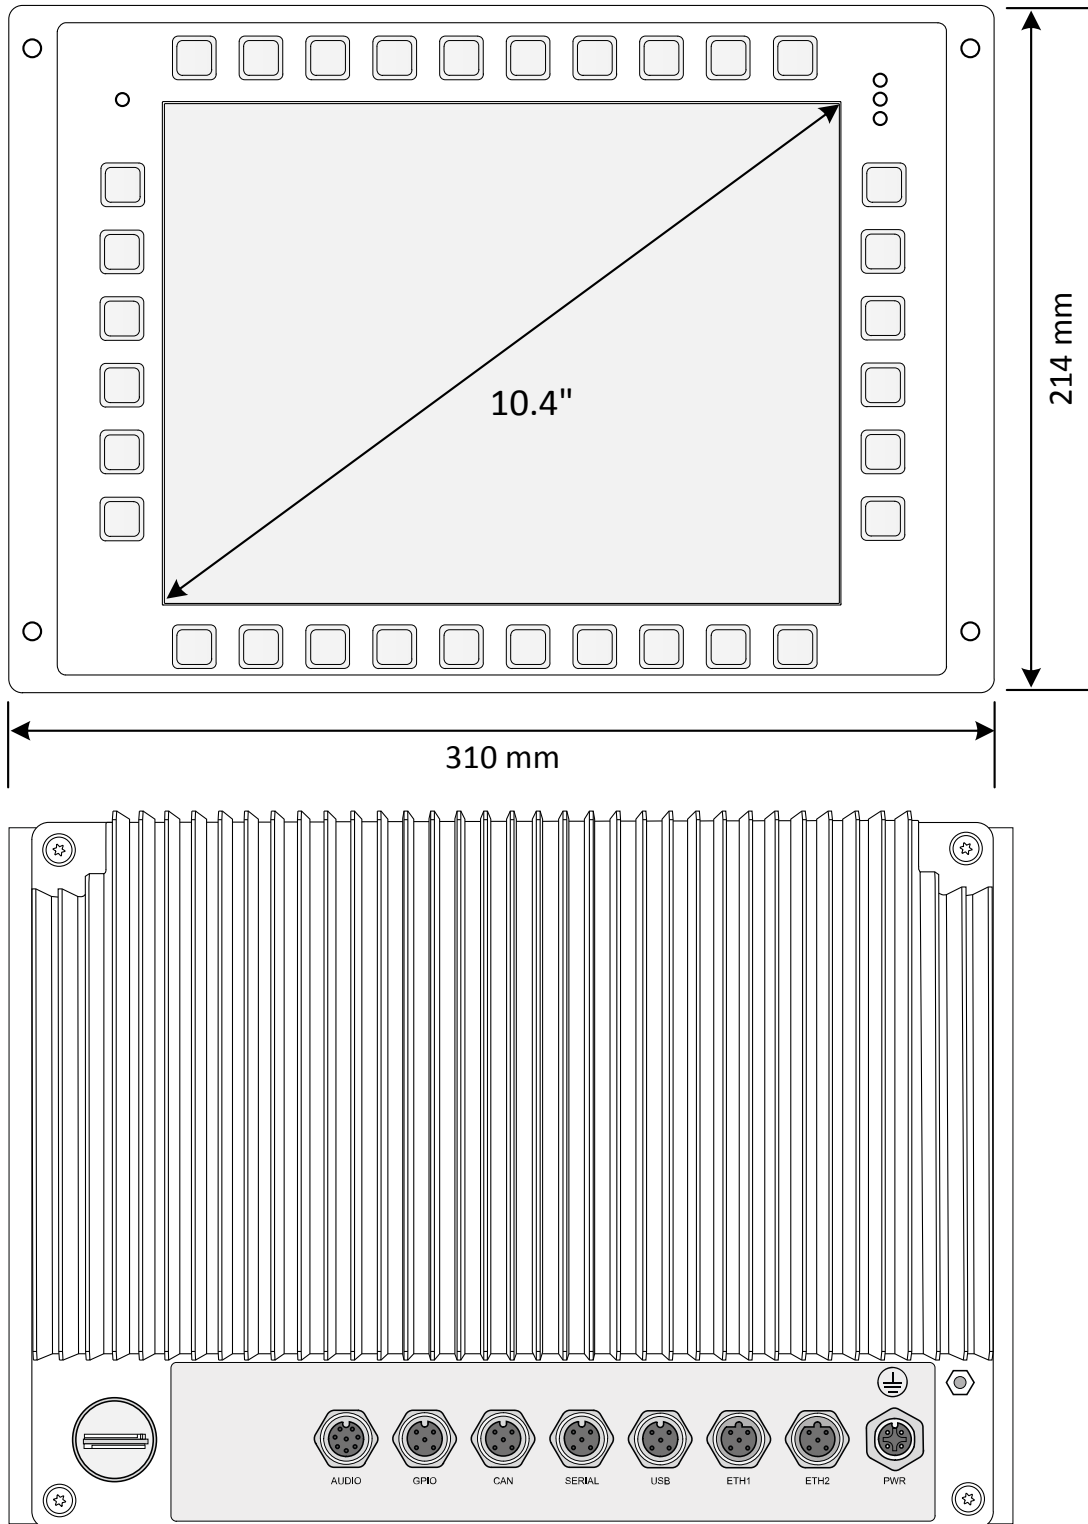

**Diagram**

**CPU**

- AMD G-Series T40E dual-core, 1.0 GHz processor core frequency

**Display**

- Screen size: 10.4"
- Resolution: 1024 x 768 pixels
- Luminance: 350 cd/m<sup>2</sup>
- Colors: 16.2 M
- Viewing angle: +/-80° min. horizontal/vertical
- Anti-glare safety glass
- Ambient light measurement
- Software controlled display brightness

**Memory**

- System Memory
  - Soldered DDR3
  - 2 GB
- mSATA
  - 16 GB (aMLC)
  - 2 GB, 4 GB or 8 GB (optional)

**Wireless Functionality**

- The following devices can be assembled:
  - One PCI Express Mini Card, Full-Mini
  - One M.2 card, Type 3042
  - Two micro-SIM cards

**Front Interfaces**

- Touch panel (optional)
  - Projected Capacitive Touch (PCT)
  - Two finger multi-touch
- Status LEDs
- Light sensor
- Front keys (optional)
  - 32 keys with tactile feedback
  - Complying with UIC612-01 (Display System in Driver Cabs)

**In-System Interfaces**

- mSATA
  - One mSATA slot
- PCI Express Mini Card
  - One PCI Express Mini Card slot
  - PCIe, USB 2.0
- M.2
  - One M.2 slot
  - USB 2.0

## Rear Interfaces

- Ethernet
  - Two 4-pin M12 connectors, D-coded, 100BASE-T
- USB
  - One 5-pin M12 connector, A-coded, USB 2.0
- Antenna connections (optional)
  - Two antenna connector cutouts
  - For wireless interface cards
  - One RP-SMA connector for 2G, 3G or 4G (optional)
  - One SMA connector for GPS (optional)
- SIM card
  - Two micro-SIM card slots, dual SIM
- UART
  - One 5-pin M12 connector, A-coded
  - Software-configurable as RS232/RS422/RS485
- CAN
  - One 5-pin M12 connector, A-coded
- GPIO
  - One 5-pin M12 connector, B-coded
- Multifunctional Vehicle Bus (MVB) (optional)
  - EMD or ESD+ according to IEC 61375
  - Process Data (PD), Message Data (MD) and Bus Administrator (BA)
  - Available via Duagon PCI Express Mini Card (not included)
- Audio
  - One 8-pin M12 connector, A-coded
  - Adjustable volume level
  - Single ended stereo line in
  - Differential stereo line out
- Power Supply
  - One 4-pin M12 connector, A-coded

## Supervision and Control

- Watchdog
- Operating hour counter
- Power cycle counter
- CPU temperature measurement
- Buzzer for signaling alarm
- Display temperature measurement (display off at extreme temperatures)

## Electrical Specification

- Power Supply
  - 24 V or 110 V DC nominal; 14.4 V to 33.6 V DC or 66 V to 154 V DC max. (EN 50155)
  - Power interruption class S2 (10 ms) (EN 50155)
- Reverse polarity protection
- Power consumption
  - 30 W approx.

## Mechanical Specifications

- Dimensions
  - Device: (W) 310 mm, (D) 214 mm, (H) 75 mm
  - Cut-out: (W) 280 mm, (H) 205 mm
- Weight: approx. 4500 g

---

## **Environmental Specifications**

- Temperature range (operation):
    - -30°C to +70°C for the display panel
    - -40°C to +70°C, with up to +85°C for 10 minutes according to class TX (EN 50155) for the computer
  - Temperature range (storage): -40 to +85°C
  - Cooling concept
    - Fanless operation, natural convection
  - Humidity: EN 60068-2-30, EN 50155
  - Altitude: -300 m to +3000 m
  - Shock: EN 61373, EN 50155
  - Vibration: EN 61373, EN 50155
  - Conformal coating of internal components
  - Protection rating
    - IP65 (Front)
    - IP20 (Back and sides)
- 

## **Reliability**

- MTBF
    - 236 505 h @ 40°C according to IEC/TR 62380 (RDF 2000) (model 09DC15-00)
- 

## **Safety**

- Electrical Safety
    - EN 50153
    - EN 50155
  - Fire Protection
    - EN 45545-2, hazard level HL3
- 

## **EMC**

- EN 50121-3-2
- 

## **BIOS**

- InsydeH2O UEFI Framework
- 

## **Software Support**

- Linux
- Windows
  - Windows 7 Embedded

## Germany

### **MEN Mikro Elektronik GmbH**

Neuwieder Straße 3-7  
90411 Nuremberg  
Phone +49-911-99 33 5-0

sales@men.de  
[www.men.de](http://www.men.de)

## USA

### **MEN Micro Inc.**

860 Penllyn Blue Bell Pike  
Blue Bell, PA 19422  
Phone 215-542-9575

sales@menmicro.com  
[www.menmicro.com](http://www.menmicro.com)

## France

### **MEN Mikro Elektronik SAS**

18, rue René Cassin  
ZA de la Châtelaine  
74240 Gaillard  
Phone +33-450-955-312

sales@men-france.fr  
[www.men-france.fr](http://www.men-france.fr)

## China

### **MEN Mikro Elektronik (Shanghai) Co., Ltd.**

Room 808-809, Jiaxing Mansion, No. 877 Dongfang Road  
200122 Shanghai  
Phone +86-21-5058-0961

sales@men-china.cn  
[www.men-china.cn](http://www.men-china.cn)

### **Up-to-date information, documentation and ordering information:**

[www.men.de/products/dc15/](http://www.men.de/products/dc15/)

*The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.*

*MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.*

*MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.*

*The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.*

*In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.*

© 2017 MEN Holding